



CEILING MOUNT

CM101-SH Series

VANDAL RESISTANT CEILING MOUNT
Indoor/Outdoor — IND, LED, HID

SERIES

CM101-SH Shallow Ceiling Mount Series CM101-SH

LAMP TYPE

- MH Metal Halide
- IC Circle Induction
- QL QL Induction
- LED Light Emitting Diode

VOLTAGE

- 120 120 Volts
- 277 277 Volts
- 347 347 Volts
- QV Quad Volt [120/208/240/277]
- UNV 120~277 Universal Volt
Must Specify Voltage for EM option

BALLAST

- EBX Electronic Ballast/Driver
- EBMH Electronic Ballast for Metal Halide
- HPF HPF Magnetic Ballast for MH
- IND Induction HF Generator

FINISH

- BK Black
- BZ Bronze - Standard
- CC Custom Color
- PA Painted Aluminum
- WHT White

OPTIONS

- C .125" K12 Prismatic Polycarbonate Lens
- D .156" Prismatic Polycarbonate
- G .156" Clear Tempered Glass
- K .156" C73 Prismatic Tempered Glass
- CT3 ±3000K Color Temp [N/A for MH]
- CT4 ±4000K Color Temp [N/A for MH]
- CT5 ±5000K Color Temp [N/A for MH]
- DIM Dimming Ballast
**Refer to DIM Table for options*
- DT Drop Tapered Sides Diffuser
- EM Integral Emergency Battery
*- Must Specify Voltage [120V or 277V];
Refer to EM Table for options]
- FUS Fuse and Fuseholder
- FUS2 Double Fusing
- GN Generator Transfer Device
- H/L Dual Circuit, High/Low Light Level for LED
- MD Motion Detector for LED, Integral
- MDX External Motion Detector for LED
Specify Finish: Bronze or White
- PHT1 Integral Photocell 120V
- PHT7 Integral Photocell 277V
- QMB Quick Mount Galvanized "J" Box
- QRS Quartz Restrike Relay [120V Only]
Lamp by others
- REM Remote Emergency Battery
*self-contained in CA
- Must Specify Voltage [120V or 277V];
Refer to EM Table for options]
- SU Surge Protection for LED fixtures
- TPD Tamperproof Screwdriver


CM101-SH LAMPING TABLE

MH	QL	LED
[1]50	[1]55	40
[1]70		60
[1]100		


SPECIFICATIONS

Superb combination of classic styling, spec-grade construction and energy efficient illumination. High Abuse Series luminaires provide smooth, wide spread accent and security lighting with superior weather and vandal-resistant design features.

- BALLAST — 120 or 277 Volt, [HPF] high power factor is Standard. Pulse Start MH. [IND] induction generator.
- FINISH — Bronze oven baked polyester powder coat.
- GASKETING — High temperature anti-aging black EPDM and/or neoprene rubber concealed in housing pocket, with cast-in drip shield enclosure and rear wire entrance hole protecting against outside contamination.
- HOUSING — Heavy wall cast aluminum with wire access on 4 sides and back thru threaded .5" conduit size entrance holes.
- LAMP — [MH] Metal Halide; [QL] QL Induction, [IC] Circle Induction; [LED] Light Emitting Diode.
- LENS — .125" thick UV stabilized injection molded clear prismatic high impact polycarbonate.
- LENS FASTENERS — 4 stainless steel tamperproof screws to secure lens in place.
- LABELS — UL/ULC listed, Suitable For Wet Location.
- REFLECTOR — .032 textured aluminum highly efficient and reduces arc tube voltage rise.

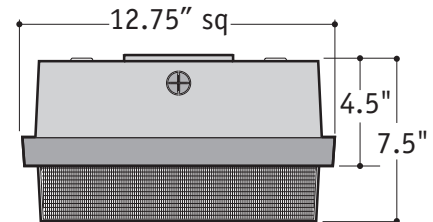

Optional Drop Tapered Sides Diffuser

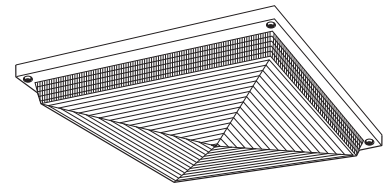

SUBMITTAL INFORMATION

Project: _____

Location: _____

Catalog No.: _____

Fixture Type: _____