



CEILING MOUNT

CM103 Series

MULTI-PURPOSE CEILING MOUNT
Indoor/Outdoor — FL, IND, LED, HID

SERIES

CM103 Ceiling Mount Series CM103

LAMP TYPE

- TBX Triple Biax Mini-Fluorescent [QMB req'd with 3 Lamps 57W and 2 Lamps 70W]
MH Metal Halide
CMH CosmoPolis™ Metal Halide Ceramic Lamp by Philips [277V Standard for CMH]
ICE Osram® ICE Induction
IC Circle Induction
QL QL Induction [165W req's QMB & 11" casting]
LED Light Emitting Diode [req's QMB]

VOLTAGE

- 120 120 Volts
277 277 Volts [Standard for CMH]
347 347 Volts
QV Quad Volt [120/208/240/277]
UNV 120-277 Universal Volt
Must Specify Voltage for EM option

BALLAST

- EBX Electronic Ballast/Driver
EBMH Electronic Ballast for MH
HPF High Power Factor for MH
IND Induction HF Generator

FINISH

- BK Black
BZ Bronze - Standard
CC Custom Color
WHT White

OPTIONS

- CT3 ±3000K LED/QL Color Temp
CT4 ±4000K LED/QL Color Temp
CT5 ±5000K LED/QL Color Temp
DIM Dimming Ballast
\*Refer to DIM Table for options
EM Emergency Battery
- Must Specify Voltage [120V or 277V];
\*Refer to EM Table for options
FUS Fuse and Fuseholder
FUS2 Double Fusing
GN Generator Transfer Device
H/L Dual Circuit, LED High/Low Light Level
LECS\* LED Emergency Circuit [1] Five Watt
LEC10\* LED Emergency Circuit [2] Five Watt
\*Must Specify Voltage for incoming EM Circuit [by others]
A = 12V or B = 120V
HUB1 Myers Hub .5"
HUB2 Myers Hub .75"
MD Motion Detector
PC Prismatic Polycarbonate Diffuser [Type V]
PM Pendant Mount [12" Stem Standard]
QMB Quick Mount Galvanized "J" Box
QRS Quartz Restrike Relay [120V Only]
Lamp by others
SU Surge Protection for LED fixtures
TPD Tamperproof Screwdriver


CM103 LAMPING TABLE

Table with 7 columns: TBX, MH, CMH, ICE, IC, QL, LED. Rows show lamp configurations and counts.

SPECIFICATIONS

High performance refractor luminaire provides optimal 85% spread light. Long lamp life Induction or LED model for difficult-to-relamp and high ceiling applications. Heavy-duty construction for durability and low maintenance.

- BALLAST — 120 or 277 Volt, extreme temp range -30°C to 90°C, HPF electronic ballast [EBX] for FL; Pulse Start for HID; [IND] HF induction generator for Induction ICE or QL.
DIFFUSER — 16" Diameter. Acrylic with Clear Dome Lens. 85% spreadlight, 15% uplight. IES Type V distribution.
FINISH — Oven baked [WHT] white polyester powder.
GASKETING — High temperature silicone rubber & rear wire entrance hole protects against dust, moisture and outside contamination.
HOUSING — Cast aluminum.
LAMP — [TBX] Triple Biax; [MH] Metal Halide; [ICE] Osram® ICE and [QL] QL Induction; [LED] Light Emitting Diode.
LENS FASTENERS —
LABELS — UL/ULC listed, Suitable For Wet Location.
MOUNTING — Housing supplied with (3) .312" clearance holes for .25" screws for direct mount.

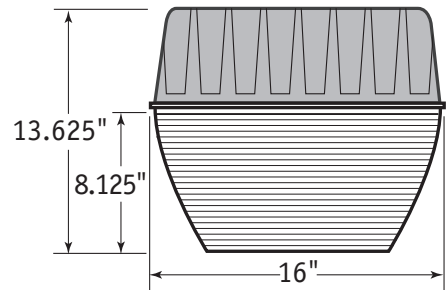

SUBMITTAL INFORMATION
Project: \_\_\_\_\_
Location: \_\_\_\_\_
Catalog No.: \_\_\_\_\_
Fixture Type: \_\_\_\_\_