



CEILING MOUNT

CM107 Series

MULTI-PURPOSE CEILING MOUNT
Indoor/Outdoor — FL, IND, LED, HID

SERIES

CM106 Ceiling Mount Series CM106

LAMP TYPE

- BX Biax Mini-Fluorescent
TBX Triple Biax Mini-Fluorescent
MH Metal Halide
EMH Elite™ Metal Halide Ceramic Lamp by Philips [277V Standard]
ICE Osram® ICE Induction
QL QL Induction
LED Light Emitting Diode

VOLTAGE

- 120 120 Volts
277 277 Volts [Standard for EMH]
347 347 Volts
QV Quad Volt [120/208/240/277]
UNV 120~277 Universal Volt
Must Specify Voltage for EM option

BALLAST

- EBX Electronic Ballast/Driver
EBMH Electronic Ballast for MH
HPF High Power Factor for MH
IND Induction HF Generator

FINISH

- BK Black
BZ Bronze
CC Custom Color
WHT White - Standard

OPTIONS

- D K12 prismatic polycarb. lens .156" thick
G Clear tempered glass lens .156" thick [Standard]
H Clear polycarbonate lens .250" thick
J Clear polycarbonate lens .187" thick
K C73 prism. tempered glass lens .156"
CT3 ±3000K LED/QL Color Temp
CT4 ±4000K LED/QL Color Temp
CT5 ±5000K LED/QL Color Temp
DIM Dimming Ballast
*Refer to DIM Table for options
DSS Drop Straight Sides Diffuser
DT Drop Tapered Sides Diffuser
FUS Fuse and Fuseholder
GN Generator Transfer Device
H/L Dual Circuit, LED High/Low Light Level
LECS* LED Emergency Circuit [1] Five Watt
LEC10* LED Emergency Circuit [2] Five Watt
*Must Specify Voltage for incoming EM Circuit [by others]
A = 12V or B = 120V
QRS Quartz Restrike Relay [120V Only]
Lamp by others
RG Remote generator [ICE]
WG Wire Guard


CM106 LAMPING TABLE

Table with 7 columns: BX, TBX, MH, EMH, ICE, QL, LED. Rows show lamp configurations and counts.

SPECIFICATIONS

Vandal-resistant surface mount luminaire for security and general purpose lighting. Fluorescent BX and TBX model. High efficiency HID models. Long lamp life
Osram® ICE or QL Induction model for difficult-to-relamp areas and long operating hours. Heavy-duty construction for weather and vandal resistance in high abuse applications.

- BALLAST — 120 or 277 Volt, extreme temp range -30°C to 90°C, HPF electronic ballast [EBX] for FL; [HPF] high power factor, [QV] quad volt for HID; [IND] HF induction generator for Induction ICE or QL.
FINISH — Oven baked [WHT] white polyester powder.
GASKETING — High temp anti-age black EPDM and/or neoprene rubber around lens perimeter & rear wire entrance hole, protects from dust, moisture and outside contamination.
HOUSING — Formed aluminum.
LAMP — [BX] Biax and [TBX] Triple Biax; [MH] Metal Halide; [ICE] Osram® ICE and [QL] QL Induction; [LED] Light Emitting Diode.
LENS — Clear tempered glass. .156" thick secured to frame with hinge and gasketing.
LENS FASTENERS — 4 stainless steel tamperproof screws secure lens in place.
LABELS — UL/ULC LISTED Suitable For Wet Location.
MOUNTING — Surface Ceiling.
REFLECTOR — Textured .032 aluminum for high efficiency and reduction in arc tube voltage rise.

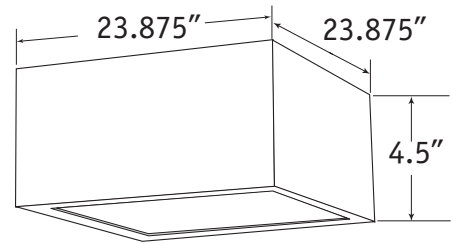

SUBMITTAL INFORMATION
Project: _____
Location: _____
Catalog No.: _____
Fixture Type: _____