



CEILING MOUNT

CM111 Series

ADA COMPLIANT CEILING MOUNT
Indoor/Outdoor — FL, IND, LED, HID

SERIES

- CM111 Ceiling Mount Series CM109
CM111-C Ceiling Mount CM111 Cast Series

LAMP TYPE

- BX Biax Mini-Fluorescent
DBX Double Biax Mini-Fluorescent
TBX Triple Biax Mini-Fluorescent
MH Metal Halide [Cast Req'd]
LED Light Emitting Diode

VOLTAGE

- 120 120 Volts
277 277 Volts [Standard for CMH & EMH]
QV Quad Volt [120/208/240/277]
UNV 120~277 Universal Volt
Must Specify Voltage for EM option

BALLAST

- EBX Electronic Ballast
2EBX Two Electronic Ballasts
EBMH Electronic Ballast for MH
HPF High Power Factor Magnetic Ballast for MH

FINISH

- BK Black
BZ Bronze
CC Custom Color
PA Painted Aluminum
WHT White — Standard

OPTIONS

- AC Acrylic Diffuser
CT3 ±3000K LED Color Temp
CT4 ±4000K LED Color Temp
CT5 ±5000K LED Color Temp
DIM Dimming Ballast
EM Emergency Battery [Cast Only]
FUS HLR/GLR Fuse and Fuseholder
HE Horizontal Eyelid
MD Motion Detector
REM Remote Emergency Battery
TPD Tamperproof Screwdriver



CM111 LAMPING TABLE

Table with 6 columns: Model, BX, DBX, TBX, MH, LED. Rows include CM111 and CM111-C with various lamp configurations.

SPECIFICATIONS

Elegant luminaire presents a very shallow profile with a floating diffuser for soft interior lighting effects. Superb combination of classic styling and energy-efficient illumination.

- BALLAST — For Compact Fluorescent Electronic Cold Weather HPF is Standard. For HID Pulse Start is Standard.
DIFFUSER — Opal white polycarbonate — Standard. Optional opal white acrylic.
FINISH — Polyester powder coat white Standard. Optional Custom Colors
GASKETING — High temperature, non-aging black EPDM and/or neoprene rubber concealed in housing pocket and enclosed by cast-in drip shield and rear wire entrance hole to protect against outside contaminants.
HOUSING — CM111: Die Cast Aluminum pan furnished with J-box mounting hardware for surface ceiling or wall mount. CM111-C: Heavy wall cast aluminum with wire access on four sides and back through threaded 1/2" conduit size entrance holes.
LAMP — Compact Fluorescent, Metal Halide— Supplied by others; Super Bright White LED.
LABELS — UL/ULC Listed to U.S. and Canadian safety standards. Suitable for wet or damp locations.
MOUNTING — CM111: Center access hole for mounting to (3) standard trade "J" boxes. (Contractor selected and drilled); CM111-C: Four point mounting on 11-1/2" bolt circle.
REFLECTOR — .032 textured aluminum for high efficiency and reduce arc tube voltage rise
SOCKET — (HID) 4 KV rated medium base porcelain with 16 GA 200° C—SF-2 lead wires

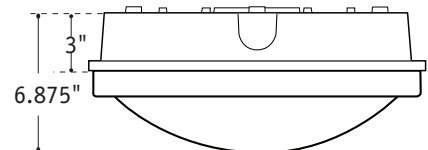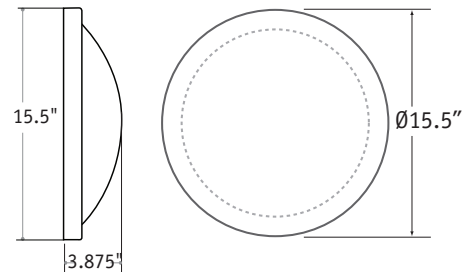

SUBMITTAL INFORMATION
Project: \_\_\_\_\_
Location: \_\_\_\_\_
Catalog No.: \_\_\_\_\_
Fixture Type: \_\_\_\_\_