

FULL CUT-OFF

FC100 Series

FULL CUT-OFF WALL MOUNT
Indoor/Outdoor — FL, LED, HID

SERIES

FC100 FC100 Full Cut-Off Wall Mount Series

LIGHT DISTRIBUTION [must specify]

FT Forward Throw
WT Wide Spread Throw

LAMP TYPE

DBX Double Biax Mini-Fluorescent
TBX Triple Biax Mini-Fluorescent
MH Metal Halide
QL QL Induction
LED Light Emitting Diode

VOLTAGE

120 120 Volts
277 277 Volts
347 347 Volts
QV Quad Volt [120/208/240/277]
UNV 120~277 Universal Volt
Must Specify Voltage for EM option

BALLAST

EBX Electronic Ballast
EBMH Electronic Ballast for MH
HPF High Power Factor for MH

FINISH

BK Black
BZ Bronze
PA Painted Aluminum
SV Silvadillo Gray
WHT White

OPTIONS

- N .187" Clear Tempered Glass - Standard
- CT3 ±3000K LED Color Temp
- CT4 ±4000K LED Color Temp
- CT5 ±5000K LED Color Temp
- DIM Dimming Ballast
**Refer to DIM Table for options*
- EM Integral Emergency Battery [req's CA]
- Must Specify Voltage [120V or 277V]
- FUS Fuse and Fuseholder
- FUS2 Double Fusing
- GN Generator Transfer Device
- H/L Dual Circuit for High/Low Light Level for LED
- LEC5* LED Emergency Circuit [1] Five Watt
- LEC10* LED Emergency Circuit [2] Five Watt
**Must Specify Voltage for incoming EM Circuit [by others]
A = 12V or B = 120V*
- MDX External Motion Detector
Specify Finish: Bronze or White
- PC Polycarbonate Diffuser [DBX/TBX Only]
- PHT1 Integral Photocell 120V
- PHT7 Integral Photocell 277V
- REM Remote Emergency Battery—needs to be wired to recessed J-Box—no conduit entry
self-contained in CA - Must Specify Voltage [120V or 277V]
- SU Surge Protection for LED fixtures
- TPD Tamperproof Screwdriver



FC100 LAMPING TABLE

DBX	TBX	MH	QL	LED
[1]26	[1]32	[1]50	[1]55	20
	[1]42	[1]70		30
		[1]100		40
		[1]150		

SPECIFICATIONS

Superb combination of classic styling, spec-grade construction, and energy-efficient illumination. Dark Sky luminaires provide smooth, wide spread accent and security lighting while maintaining full cut-off standards to preserve true night sky.

- BACKPLATE — Cast aluminum.
- BALLAST — 120 or 277 Volt, extreme temp range -30°C to 90°C, HPF electronic ballast [EBX] for FL. For HID Pulse Start is Standard.
- FINISH — Oven baked Polyester Powder Coat.
- GASKETING — High temperature black EPDM and neoprene rubber concealed in housing pocket & enclosed by cast in drip shield and rear wire entrance hole protects against dust, moisture and outside contamination.
- HOUSING — Heavy wall cast aluminum with wire access on back through threaded .5" conduit size entrance hole; Gasketed.
- LAMP — [DBX] Double Biax, [TBX] Triple Biax; [MH] Metal Halide; [LED] Light Emitting Diode.
- LENS — Standard .187" Clear Tempered Glass.
- LENS FASTENERS — Stainless steel tamperproof screws - [2] To secure lens in place.
- LABELS — UL/ULC listed, Suitable For Wet Location.
- REFLECTOR — Specular Aluminum [032 Prescription] for high efficiency and reduce arc tube voltage rise.

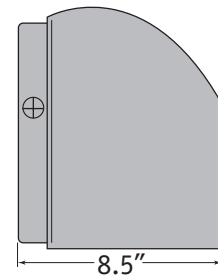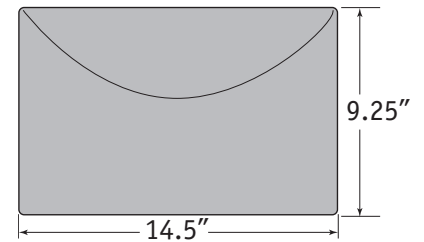

SUBMITTAL INFORMATION

Project: _____

Location: _____

Catalog No.: _____

Fixture Type: _____