






# RECESSED

NOT TO BE INSTALLED IN INSULATED CEILING

## RC6

RECESSED MOUNT  
LED Recessed Downlight

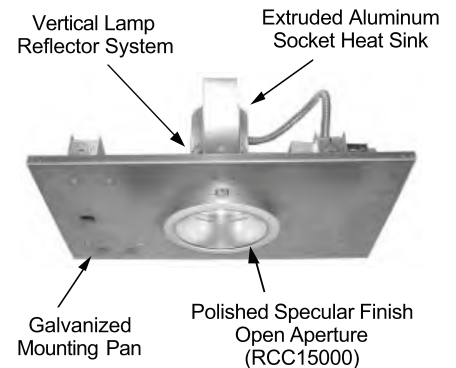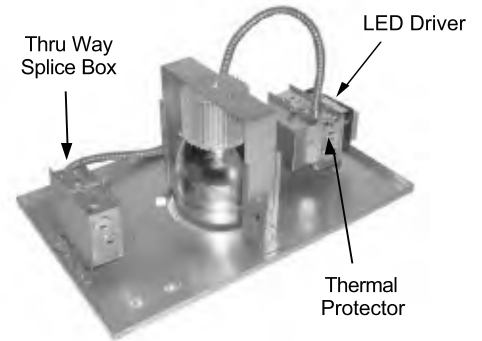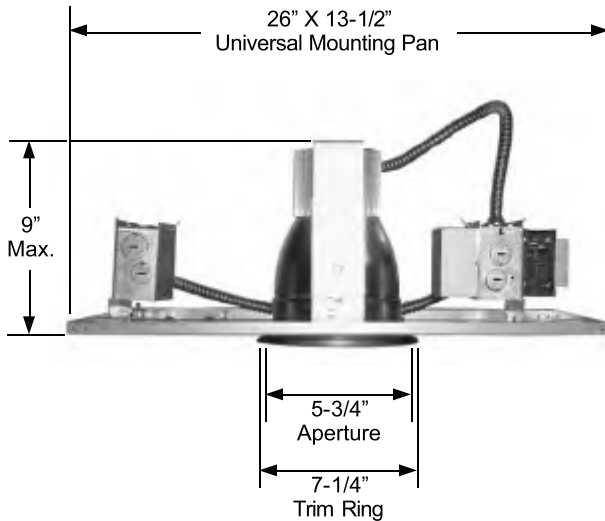

### ORDERING INFORMATION:

#### SERIES

RC6 = RC6 Series - 6" dia. downlight

#### SERIES TYPE

AO = Architectural open downlight  
(Tempered glass lens recessed in aperture)

AOB = Architectural open downlight with mini-groove baffle  
(Tempered glass lens recessed in aperture)

#### LAMP TYPE/LAMP QUANTITY/WATTAGE

LED36 = Light Emitting Diode 36 Watt  
LED53 = Light Emitting Diode 53 Watt

#### COLOR TEMP (LED)

3K = 3000K color range, 65 LPW  
4K = 4000K color range, 76 LPW  
5K = 5000K color range, 80 LPW

#### VOLTAGE

EBU = HighTemp Universal Volt (120-277)

#### OPTIONS

FUS = Single Fusing  
DFUS = Double Fusing  
LG = Louver Guard  
SA10 = Slope Adapter - 10° Slope  
SA20 = Slope Adapter - 20° Slope  
SA30 = Slope Adapter - 30° Slope

### SPECIFICATIONS

- LED DRIVER — EBU (120-277V)
- REFLECTOR — Spun aluminum #1100, buffed and etched, then electro-chemically processed to satin finish.
- MOUNTING — 18 Ga. (.048") galvanized steel die formed universal mounting frame fits most ceiling systems; min. 1/2", max. 2" thick. Thru way splice box.
- LAMP — 30W or 53W LED - INCLUDED.
- HEAT SINK — Extruded aluminum, supports light engine. Dissipates heat from LED board.
- LENS — See ordering information.
- THERMAL DEVICE — Automatic resetting heat sensitive device for non-IC installations. Protects fixture from overheating if insulation covers fixture.
- LABELS — ETL, CETL listed, suitable for wet location under covered ceiling. I.B.E.W. labeled.
- LM79/LM80 — Pending

### SUBMITTAL INFORMATION

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Catalog No.: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_