

WALL MOUNT

WM100-WE Series



DECORATIVE WALL MOUNT SCENCE
Indoor/Outdoor — FL, IND, LED, HID

SERIES	
WM100	WM100 Wall Sconce Series
STYLE	
WE	Half-Round Diffuser; 4 Horizontal & 1 Vertical Bars
SIZE	
18-ADA	8.25" [A] x 18" [B] x 4" [C]
26-ADA	8.25" [A] x 26.25" [B] x 4" [C]
30-ADA	8.25" [A] x 30" [B] x 4" [C]
38-ADA	8" [A] x 38" [B] x 4" [C]
LAMP TYPE	
BX	Biax Mini-Fluorescent
DBX	Double Biax Mini-Fluorescent
TBX	Triple Biax Mini-Fluorescent
T5	T5 Miniature Bi-Pin
T5HO	High Output T5 Miniature Bi-Pin
T8	T8 Medium Bi-Pin
LED	Light Emitting Diode
LU/LD	Light Emitting Diode Uplight or Downlight
NO. OF LAMPS/WATTAGE	
Select from the Lamping Table	
[* Consult Factory on wattage restrictions for models with PF and/or SSD]	
VOLTAGE	
120	120 Volts
277	277 Volts
347	347 Volts
UNV	120-277 Universal Volt
BALLAST	
EBX	Electronic Ballast
FINISH	
BK	Black
BZ	Bronze
CC	Custom Color [Specify RAL#]
PA	Painted Aluminum
SV	Silvadillo Gray
WHT	White
OPTIONS	
0-10D	0-10V low-voltage LED Dimming
CA	Aluminum Backbox/Surface Conduit [2" deep] - removes ADA Status
CLTB	Clear Top & Bottom [Std with Up/Downlight]
CT3	±3000K LED/QL Color Temp
CT4	±4000K LED/QL Color Temp
CT5	±5000K LED/QL Color Temp
CU	Custom Requirements
DIM	Dimming Ballast *Refer to DIM Table for options
FUS	Fuse and Fuseholder
FUS2	Double Fusing
H/L	Dual Circuit for High/Low Light Level for LED
LECS*	LED Emergency Circuit [1] Five Watt
LEC10*	LED Emergency Circuit [2] Five Watt
*Must Specify Voltage for incoming EM Circuit [by others] A = 12V or B = 120V	
MD	Integral Motion Detector
OTB	Opaque Top & Bottom
OPTB	Open Top & Bottom [indoor only]
PF	Aluminum Perforated Decorative Insert*
PHT1	Integral Photocell 120V [req's CA]
PHT7	Integral Photocell 277V [req's CA]
REM	Remote Emergency Battery self-contained in CA - Must Specify Voltage [120V or 277V]; *Refer to EM Table for options
TPD	Tamperproof Screwdriver
SSD	Solid Shield Insert*

WM100-WE-ADA NO. OF LAMPS/WATTAGE							
	BX	DBX	TBX	T5/T5HO	T8	LED	LU/LD
18" ADA	N/A	N/A	[1]32	N/A	N/A	N/A	N/A
26" ADA	[2]13	[1-2]13	[1-2]26	[1-2]14	[1-3]17	40	3/3
	[2]18	[1-2]18	[1-2]32	[1-2]24			
	[2]24	[1-2]26					
	[1]36						
	[1]39						
[1]50							
30" ADA	[1]36	N/A	N/A	[1-2]14	[1-3]17	60	3/3
	[1]39			[1-2]24			
38" ADA	[2]24	N/A	N/A	[1-2]21	[1-2]17	60	3/3
	[2]36			[1-2]39			

SPECIFICATIONS

- **BALLAST** — 120 or 277 Volt, extreme temp range -30°C to 90°C, HPF electronic ballast [EBX] for FL.
- **BACKBOX** — 16 ga aluminum. Wire access through .875" dia. KO on four sides and back. Water tight. Standard with emergency battery, H.I.D. and some fluorescent models. Optional for surface conduit entry.
- **BACKPLATE** — 16 gauge aluminum
- **CAGE** — Standardized .375" or .5" square aluminum bars secured by hidden means to the frame. Standard square extruded bars. Standard configurations shown; custom spacing available.
- **DIFFUSER** — Translucent white non-yellowing 100% virgin acrylic. Fully enclosed. Clear top and bottom [CLTB] is Standard with Uplight or/and Downlight; Optional with other types of lamping. Optional Opaque top, bottom or both [OTB]. Optional Open [OPTB] top and/or bottom — Indoor Only. Optional [PF] perforated aluminum insert.
- **FINISH** — Pre-treated highly durable oven baked polyester powder finish. Corrosion and Weather resistant.
- **GASKETING** — High temperature and non-aging neoprene rubber and/or black EPDM completely around the perimeter of the lens and around the rear wire entrance hole. Protects against dust, moisture and outside contamination.
- **LENS FASTENERS** — 2 Stainless steel tamperproof screws.
- **LABELS** — UL/ULC LISTED Suitable For Wet Location.
- **MOUNTING** — Access hole in center for indoor mounting to a J-BOX. For indoor/outdoor use .25" diameter bolts in 4 holes, .3125" diameter.

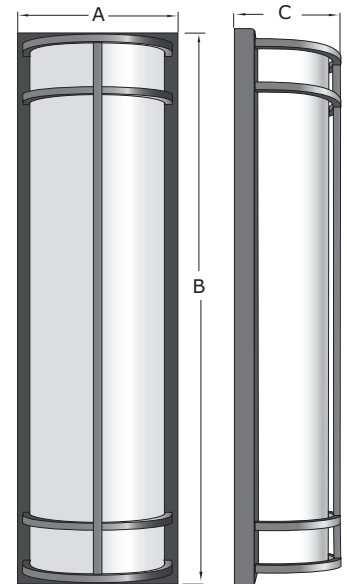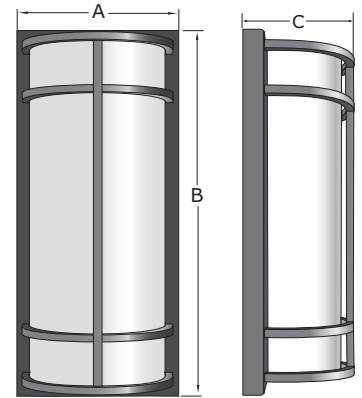

ADA COMPLIANCE
FULLY COMPLIES WITH REQUIREMENTS OF
© AMERICANS WITH DISABILITIES ACT
U.S. PUBLIC LAW No. 101-33—SECTION 4.4
- PARAGRAPH 4.4.1

SUBMITTAL INFORMATION

Project: _____
Location: _____
Catalog No.: _____
Fixture Type: _____