

WALL MOUNT

WM102 Series

DECORATIVE WALL MOUNT
Indoor/Outdoor — FL, IND, LED, HID

SERIES	
WM102	WM102 8" Deep Series
STYLE	
A	Cage Free
B	Cage with Eyelid
C	Cage
LAMP TYPE	
DBX	Double Biax Mini-Fluorescent
TBX	Triple Biax Mini-Fluorescent
QL	QL Induction
MH	Metal Halide
LED	Light Emitting Diode
VOLTAGE	
120	120 Volts
277	277 Volts
347	347 Volts
QV	Quad Volt [120/208/240/277]
UNV	120~277 Universal Volt <i>Must Specify Voltage for EM option</i>
BALLAST	
EBX	Electronic Ballast
2EBX	Two Two Electronic Ballasts
EBMH	Optional Electronic Ballast for MH
HPF	High Power Factor
OPTIONS	
CT3	±3000K LED Color Temp
CT4	±4000K LED Color Temp
CT5	±5000K LED Color Temp
DIM	Dimming Ballast <i>*Refer to DIM Table for options</i>
CPF	Clear Prismatic Flat Lens [LED Only]
FRC	Frosted Ribbed Polycarbonate Diff.
OWF	Opal White Flat Lens [LED Only]
RC	Ribbed Clear Prismatic Polycarbonate Diffuser
EM	Emergency Battery - <i>Must Specify Voltage [120V or 277V];</i> <i>*Refer to EM Table for options</i>
FUS	Fuse and Fuseholder
GN	Generator Transfer Device
H/L	Dual Circuit, High/Low LED Light Level
LEC5*	LED Emergency Circuit [1] Five Watt
LEC10*	LED Emergency Circuit [2] Five Watt <i>*Must Specify Voltage for incoming EM Circuit [by others]</i> <i>A = 120VDC or B = 120VAC or C = 24VDC or D = 277VAC</i>
MDX	External Motion Detector <i>Specify Finish: Bronze or White</i>
PHT1	Integral Photocell 120V
PHT7	Integral Photocell 277V
REM	Remote Emergency Battery <i>self-contained in CA</i> <i>- Must Specify Voltage [120V or 277V];</i> <i>*Refer to EM Table for options</i>
SRM	Semi-Recessed
SU	Surge Protection for LED fixtures
TPD	Tamperproof Screwdriver
FINISH	
BK	Black — Standard
BZ	Bronze
SV	Silvadillo Gray
WHT	White

WM102 LAMPING TABLE

DBX	TBX	MH	QL	LED
[1-2]13	[1-2]18	[1]50	[1]55	15
[1-2]18	[1-2]26	[1]70		25
[1-2]26	[1-2]32	[1]100		30
	[1-2]42			50

SPECIFICATIONS

Superb combination of classic styling, spec-grade construction, and energy-efficient illumination. Luminaires provide smooth, wide spread accent and security lighting with superior weather and vandal-resistant design features.

- **BALLAST** — Zero degree start HPF 120 or 277 Volt Electronic Ballast [EBX].
- **DIFFUSER** — Injection molded polycarbonate opal white is standard. Ribbed clear prismatic polycarbonate is optional.
- **FINISH** — Super Durable Oven Baked Polyester Powder Finish.
- **GASKETING** — One piece die cut .1875" thick black EPDM or/and neoprene rubber.
- **HOUSING** — Cast aluminum.
- **LAMP** — [DBX] Double Biax, [TBX] Triple Biax; [LED] Light Emitting Diode.
- **LENS FASTENERS** — 4 [four] Stainless steel tamper-proof screws to secure diffuser in place.
- **LABELS** — **UL/ULC LISTED** Suitable for wet environments.
- **REFLECTOR** — .160 aluminum for high efficiency.




WM102-A



WM102-B



WM102-C

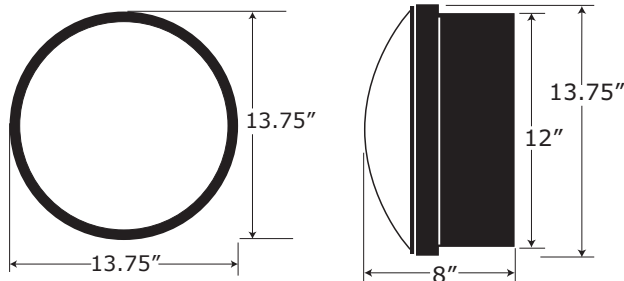

SUBMITTAL INFORMATION

Project: _____

Location: _____

Catalog No.: _____

Fixture Type: _____